


(Серия D004 D014 • VariMill™ GP — продолжение)

	P					M		K	
	0	1	2	3	4	1	2	1	2
Без покрытия	●	●	●	○	○	○	○	○	○
TIALN	●	●	●	○	○	○	○	○	○

P — Сталь                      K — Чугун                      S — Жаропрочные сплавы  
M — Нержавеющая сталь    N — Цветные металлы    H — Закаленная сталь  
Рекомендации по применению приведены на стр. 28–29

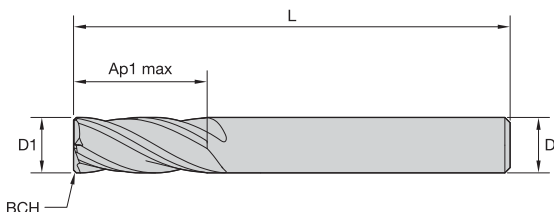

TIALN	БЕЗ ПОКРЫТИЯ	TIALN	D1	D	глубина резания Ap1 max	длина L	BSH
D0040900T013	—	—	9,0	10	13,00	66	0,50
D0140900T019	—	—	9,0	10	19,00	72	0,50
D0041000T014	—	—	10,0	10	14,00	66	0,50
D0141000T022	—	—	10,0	10	22,00	72	0,50
D0041200T016	D0041200W016	D0041200W016	12,0	12	16,00	73	0,50
D0141200T026	D0141200W026	D0141200W026	12,0	12	26,00	83	0,50
D0041400T018	D0041400W018	D0041400W018	14,0	14	18,00	75	0,50
D0141400T026	D0141400W026	D0141400W026	14,0	14	26,00	83	0,50
D0041600T022	D0041600W022	D0041600W022	16,0	16	22,00	82	0,50
D0141600T032	D0141600W032	D0141600W032	16,0	16	32,00	92	0,50
D0041800T024	D0041800W024	D0041800W024	18,0	18	24,00	84	0,50
D0141800T032	D0141800W032	D0141800W032	18,0	18	32,00	92	0,50
D0042000T026	D0042000W026	D0042000W026	20,0	20	26,00	92	0,50
D0142000T038	D0142000W038	D0142000W038	20,0	20	38,00	104	0,50