


- Rough, semi-finishing, and finishing with one system.
- Through tool coolant.
- Carbide shank to improve rigidity.

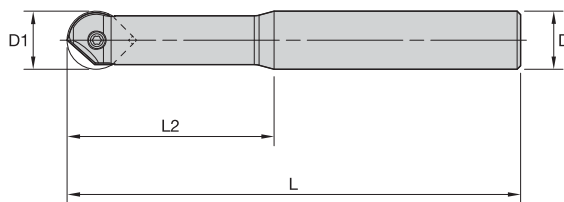

■ **Ball Nose • Carbide Cylindrical Shanks**

order number	catalogue number	D1	D	L	L2	Z	Z U	inserts	max RPM	coolant supply	kg
2424550	M270BD010A12L140C	10	12	140	45	1	2	M270B.10	57000	Yes	0,20
2424587	M270BD012A12L145C	12	12	145	50	1	2	M270B.12	55000	Yes	0,20
2424634	M270BD016A16L155C	16	16	155	57	1	2	M270B.16	53000	Yes	0,40
2639257	M270BD020A20L170C	20	20	170	70	1	2	M270B.20	52000	Yes	0,65

NOTE: ZU = Effective teeth.
Z = number of pocket seats.

■ **Spare Parts**



D1	insert screw	Nm	Torx driver
10	12748610500	2,0	12148788900
12	12748610600	2,0	12148788900
16	12748610700	5,0	12148099300
20	12748610800	5,0	12148099300

NOTE: All spare parts except the insert screws must be ordered separately.

Copy Mills