
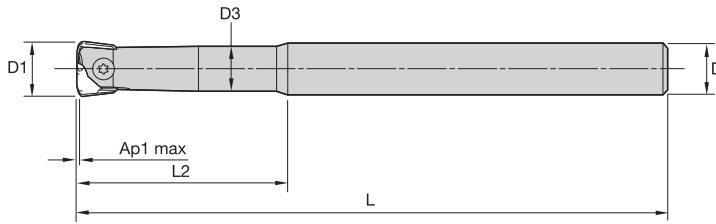


- High metal removal rates.
- Excellent in long reach applications.
- Rough and semi-finishing applications.



■ High-Feed • Cylindrical Shanks

order number	catalogue number	D1	D	D3	L	L2	Ap1 max	Z	Z U	insert 1	insert 2*	max RPM	coolant supply	kg
3926514	M270TD010A10L120	10	10	9	120	45	0,6	1	2	M270HF10	—	57000	Yes	0,06
3926515	M270TD012A12L140	12	12	11	140	50	0,6	1	2	M270HF12	M270HF13	55000	Yes	0,09
3926516	M270TD016A16L160	16	16	14	160	57	0,9	1	2	M270HF16	M270HF17	53000	Yes	0,19
3926517	M270TD020A20L180	20	20	18	180	70	1,1	1	2	M270HF20	—	52000	Yes	0,35

NOTE: ZU = Effective teeth.
Z = number of pocket seats.
*D1 = 13mm when using M270HF13; D1 = 17mm when using M270HF17.

■ Spare Parts

D1	insert screw	Nm	Torx driver
10	12748610500	2,0	12148788900
12	12748610600	2,0	12148788900
16	12748610700	5,0	12148099300
20	12748610800	5,0	12148099300

NOTE: All spare parts except the insert screws must be ordered separately.

Copy Mills