


- Centre cutting.
- Flat shallow pitch.
- Unequal flute spacing.
- Standard items listed. Additional styles and coatings made-to-order.




End Mill Tolerances

D1	tolerance d11	D	tolerance h6 + / -
≤ 3	-0,020/-0,080	≤ 3	0/-0,006
> 3-6	-0,030/-0,105	> 3-6	0/-0,008
> 6-10	-0,040/-0,130	> 6-10	0/-0,009
> 10-18	-0,050/-0,160	> 10-18	0/-0,011
> 18-30	-0,065/-0,195	> 18-30	0/-0,013

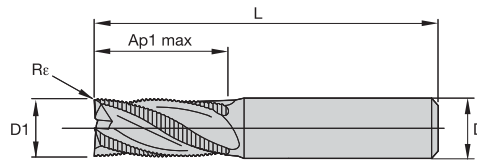

■ Series 4U40 • Victory Grades



grade WP15PE
AlTiN

- first choice
- alternate choice

order #	catalogue #	D1	D	length of cut Ap1 max	length L	Re	ZU
5583159	4U4006002T	6,0	6	6,00	57	0,75	4
5583420	4U4008003T	8,0	8	8,00	63	0,75	4
5583421	4U4010004T	10,0	10	10,00	72	0,75	4
5583422	4U4012005T	12,0	12	12,00	83	1,00	4
5583423	4U4016006T	16,0	16	16,00	92	1,00	6
5583424	4U4020007T	20,0	20	20,00	104	1,25	6
5583425	4U4025008T	25,0	25	25,00	121	1,25	6

High-Performance Solid Carbide End Mills