



- Centre cutting.
- Standard items listed. Additional styles and coatings made-to-order.

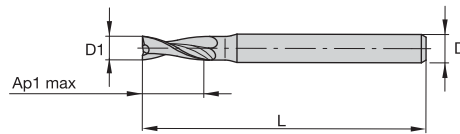


End Mill Tolerances

D1	tolerance e8	D	tolerance h6 + / -
≤ 3	-0,014/-0,028	≤ 3	0/0,006
> 3-6	-0,020/-0,038	> 3-6	0/0,008
> 6-10	-0,025/-0,047	> 6-10	0/0,009
> 10-18	-0,032/-0,059	> 10-18	0/0,011
> 18-30	-0,040/-0,073	> 18-30	0/0,013

■ Series 4632



grade UNCOATED



grade TiAlN-RT
TiAlN

- first choice
- alternate choice

order #	catalogue #	order #	catalogue #	D1	D	length of cut Ap1 max	length L
1656841	463200400..	1602266	463200400RT	0,4	3	1,50	38
1656844	463200500..	1602268	463200500RT	0,5	3	1,50	38
1656849	463200600..	1602270	463200600RT	0,6	3	1,50	38
1656853	463200800..	1602273	463200800RT	0,8	3	1,50	38
1656858	463201000..	1602274	463201000RT	1,0	3	2,00	38
1656863	463201500..	1602275	463201500RT	1,5	3	2,00	38
1656867	463202000..	-	-	2,0	3	8,00	38

High-Performance Solid Carbide End Mills