
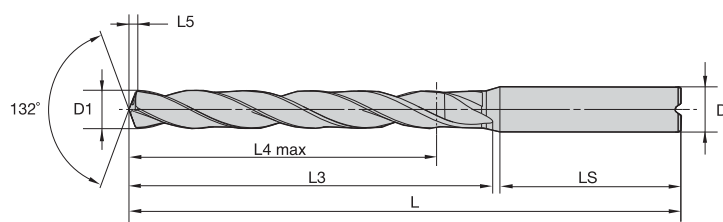


Solid Carbide Drills

TOP DRILL S+™ Long-Length Drills with Through Coolant • Steel, Stainless Steel, and Cast Iron



For information on L, L3, and L4 max, see page T143.

**■ TDS504A • 12 x D**grade WU20PD
TiAlN

D1 diameter

● first choice

○ alternate choice

order #	catalogue #	mm	in	L	L4 max	L3	L5	LS	D
4173459	TDS504A03000	3,000	.1181	93	44	52,0	0,6	36	6
4173460	TDS504A03175	3,175	.1250	93	44	52,0	0,7	36	6
4173461	TDS504A03264	3,264	.1285	93	44	53,0	0,7	36	6
4173545	TDS504A03455	3,455	.1360	93	44	53,0	0,7	36	6
4173462	TDS504A03500	3,500	.1378	93	44	53,0	0,7	36	6
4173546	TDS504A03734	3,734	.1470	93	45	54,0	0,8	36	6
4173463	TDS504A03970	3,970	.1563	107	56	66,0	0,8	36	6
4173464	TDS504A04000	4,000	.1575	107	56	66,0	0,8	36	6
4173465	TDS504A04500	4,500	.1772	107	56	67,0	0,9	36	6
4173466	TDS504A04600	4,600	.1811	107	57	68,0	1,0	36	6
4173467	TDS504A04763	4,763	.1875	125	69	82,0	1,0	36	6
4173468	TDS504A04800	4,800	.1890	125	69	82,0	1,0	36	6
4173469	TDS504A05000	5,000	.1969	125	70	83,0	1,1	36	6
4173470	TDS504A05100	5,100	.2008	125	70	83,0	1,1	36	6
4173471	TDS504A05200	5,200	.2047	125	70	83,0	1,1	36	6
4173472	TDS504A05300	5,300	.2087	125	71	84,0	1,1	36	6
4173473	TDS504A05410	5,410	.2130	125	71	84,0	1,1	36	6
4173474	TDS504A05500	5,500	.2165	125	71	84,0	1,2	36	6
4173475	TDS504A05558	5,558	.2188	125	71	84,0	1,2	36	6
4173476	TDS504A05600	5,600	.2205	125	72	85,0	1,2	36	6
4173477	TDS504A05700	5,700	.2244	125	72	85,0	1,2	36	6
4173478	TDS504A05800	5,800	.2283	125	71	85,0	1,2	36	6
4173479	TDS504A06000	6,000	.2362	125	72	86,0	1,3	36	6
4173480	TDS504A06200	6,200	.2441	139	82	97,0	1,3	36	8

(continued)