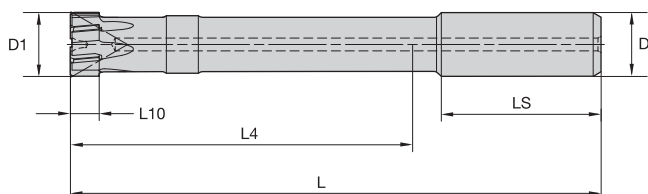





- Standard reamers listed are ground to achieve an H7 tolerance hole.
IT6 capability is available. Additional diameters and lengths made to order.


■ HSR Reamers with Helical Flutes for Through Holes • K10F™/K10F-DCFD™ • 14–32mm

 grade K10F
uncoated

 grade K10F-DCFD
TiAlN

- first choice
- alternate choice

grade K10F uncoated		grade K10F-DCFD TiAlN		D1	D	L	L4	L10	LS	Z
order #	catalogue #	order #	catalogue #							
3084978	050281-001400	3084312	450281-001400	14,00	16,00	145	90	9	48	6
3084983	050281-001600	3084317	450281-001600	16,00	20,00	157	100	9	50	6
3084992	050281-001800	3084321	450281-001800	18,00	20,00	171	114	9	50	6
3085083	050281-002000	3084319	450281-002000	20,00	20,00	200	143	9	50	6
3085084	050281-002200	3084322	450281-002200	22,00	20,00	210	153	11	50	6
3085087	050281-002400	3084323	450281-002400	24,00	20,00	210	153	11	50	6
3085089	050281-002500	3084324	450281-002500	25,00	20,00	210	153	11	50	6
3085090	050281-002600	3084325	450281-002600	26,00	25,00	240	177	11	56	8
3085092	050281-002800	3084327	450281-002800	28,00	25,00	240	177	11	56	8
3085104	050281-003000	3084320	450281-003000	30,00	25,00	270	207	11	56	8
-		3084328	450281-003200	32,00	25,00	270	207	11	56	8