
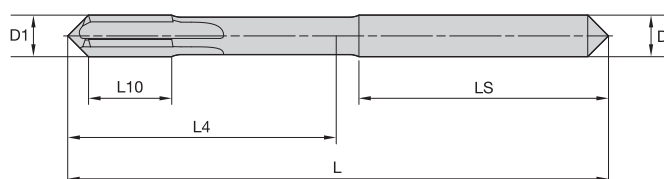




- Standard reamers listed are ground to achieve an H7 tolerance hole.
IT6 capability is available. Additional diameters and lengths made to order.



■ HSR Reamers with Straight Flutes for Blind Holes • K10F™/K10F-DCFD™ • 2–4mm


 grade K10F
uncoated

 grade K10F-DCFD
TiAlN

- first choice
- alternate choice

order #	catalogue #	order #	catalogue #	D1	D	L	L4	L10	LS	Z
2446025	050222-000200	2446371	450222-000200	2,00	3,00	48	15	6	28	4
2446029	050222-000300	2446372	450222-000300	3,00	3,00	48	15	8	28	4
2446031	050222-000400	2446415	450222-000400	4,00	4,00	54	21	8	28	4