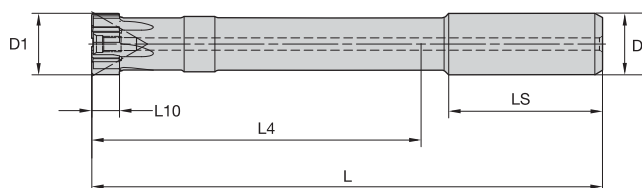





- Standard reamers listed are ground to achieve an H7 tolerance hole.
IT6 capability is available. Additional diameters and lengths made to order.


■ HSR Reamers with Straight Flutes for Blind Holes • K10F™/K10F-DCFD™ • 14–32mm

 grade K10F
uncoated

 grade K10F-DCFD
TiAlN

- first choice
- alternate choice

order #	catalogue #	order #	catalogue #	D1	D	L	L4	L10	LS	Z
3055655	050280-001400	3084512	450280-001400	14,00	16,00	145	90	9	48	6
3055656	050280-001600	3084526	450280-001600	16,00	20,00	157	100	9	50	6
3055657	050280-001800	3084528	450280-001800	18,00	20,00	171	114	9	50	6
3056095	050280-002000	3077292	450280-002000	20,00	20,00	200	143	9	50	6
3056096	050280-002200	3084529	450280-002200	22,00	20,00	210	153	11	50	6
3056097	050280-002400	3084530	450280-002400	24,00	20,00	210	153	11	50	6
3056098	050280-002500	3084531	450280-002500	25,00	20,00	210	153	11	50	6
3056099	050280-002600	3084532	450280-002600	26,00	25,00	240	177	11	56	8
3056100	050280-002800	3084593	450280-002800	28,00	25,00	240	177	11	56	8
3056102	050280-003000	3084594	450280-003000	30,00	25,00	270	207	11	56	8
3056273	050280-003200	3084595	450280-003200	32,00	25,00	270	207	11	56	8