

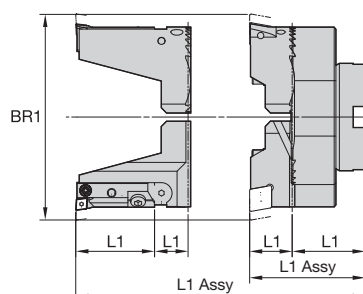


Hole Finishing

ROTAFLEX™ High-Performance Boring Systems



- For use with shell mill adaptors; please order separately.
- Bridge body shipped without insert holder, slides, or micro-adjustable cartridges.
- Order insert holder separately for rough boring and slides for fine boring.
- Order micro-adjustable cartridges separately for fine boring.



L1 Assy = L1 bridge + L1 insert holder
L1 Assy = L1 bridge + L1 slide + L1 cartridge



■ Bridge Tool • Small

order number	catalogue number	BR1 bore range	D	L1	kg
2006019	12600208800	87.000-110.000	27	40,3	1,70
2005500	12600210900	109.000-133.000	27	40,3	1,90
2005553	12600213200	132.000-156.000	27	40,3	2,10
2005556	12600215500	155.000-179.000	27	40,3	2,30
2005560	12600217800	178.000-202.000	27	40,3	2,50

NOTE: Use of ISO cartridges SCLCL12CA12, STGCL12CA16, or SSRCL12CA12 is recommended.

■ Spare Parts

catalogue number	fixing screw	fixing screw	fixing screw	disc washer	disc washer
12600208800	—	12346233000	12147519100	12147600300	—
12600210900	12147613500	—	12147519100	12147600300	12147740200
12600213200	12147613500	—	12147519100	12147600300	12147740200
12600215500	12147613500	—	12147519100	12147600300	12147740200
12600217800	12147613500	—	12147519100	12147600300	12147740200

(continued)