
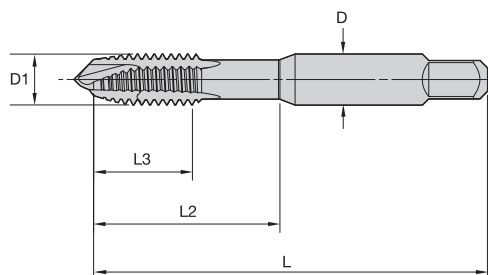



- WU40EG bright
- WU41EG TiN



Shank Tolerance

D mm	tolerance h9
1-3	+0, -0,025
>3-6	+0, -0,030
>6-10	+0, -0,036
>10-18	+0, -0,043
>18-30	+0, -0,052

■ VT-SPO • Form B Plug Chamfer • Metric • JIS


● first choice

○ alternate choice

grade WU41EG TiN		grade WU40EG Bright		metric dimensions					number of flutes	dimension standard	tap class
order #	catalogue #	order #	catalogue #	D1 size	L	L3	L2	D			
5387861	VTSP07505	5387859	VTSP07505	M3 X 0,5	46	11	19	4,0	2	JIS	ISO 2
5387865	VTSP07506	5387863	VTSP07506	M4 X 0,7	52	13	21	5,0	2	JIS	ISO 2
5387869	VTSP07507	5387867	VTSP07507	M5 X 0,8	60	16	24	5,5	2	JIS	ISO 2
5387873	VTSP07508	5387871	VTSP07508	M6 X 1	62	19	29	6,0	3	JIS	ISO 2
5387877	VTSP07509	5387875	VTSP07509	M8 X 1,25	70	22	37	6,2	3	JIS	ISO 2
5387881	VTSP07510	5387879	VTSP07510	M10 X 1,5	75	24	41	7,0	3	JIS	ISO 2
-		5387883	VTSP07511	M12 X 1,25	82	29	48	8,5	3	JIS	ISO 2
-		5387887	VTSP07513	M12 X 1,5	82	29	48	8,5	3	JIS	ISO 2
-		5387885	VTSP07512	M12 X 1,75	82	29	48	8,5	3	JIS	ISO 2
-		5387891	VTSP07515	M14 X 1,5	88	30	48	10,5	3	JIS	ISO 2
-		5387889	VTSP07514	M14 X 2	88	30	48	10,5	3	JIS	ISO 2
-		5387895	VTSP07517	M16 X 1,5	95	32	52	12,5	3	JIS	ISO 2
-		5387893	VTSP07516	M16 X 2	95	32	52	12,5	3	JIS	ISO 2
-		5387898	VTSP07518	M18 X 2,5	100	37	55	14,0	3	JIS	ISO 2
-		5387900	VTSP07519	M20 X 2,5	105	37	60	15,0	3	JIS	ISO 2