


- GP6520 TiCN for steel.




Shank Tolerance

D mm	tolerance h6
>3-6	+0, -0,008
>6-10	+0, -0,009
>10-18	+0, -0,011
>18-30	+0, -0,013
>30-50	+0, -0,016

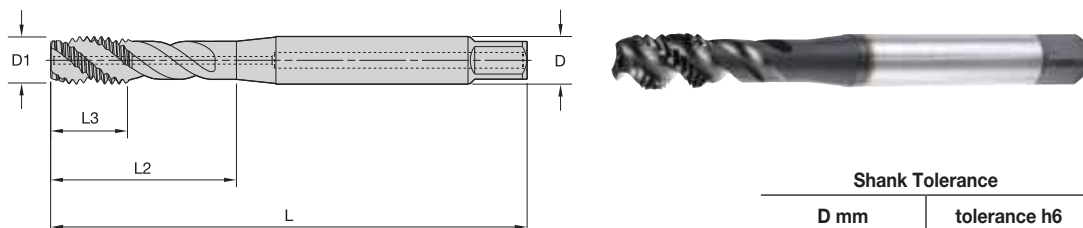

- GT33 • Form E Bottoming Chamfer • Through Coolant • Metric DIN 371, 374, and 376 • For Steel



- first choice
- alternate choice

grade GP6520 TiCN		metric dimensions					number of flutes	dimension standard	class of fit
order #	catalogue #	D1 size	L	L3	L2	D			
4153955	GT335001	M5 X 0,8	70	10	25	6,0	3	DIN 371	6HX
4153956	GT335002	M6 X 1	80	10	30	6,0	3	DIN 371	6HX
4153957	GT335003	M8 X 1,25	90	13	35	8,0	3	DIN 371	6HX
4153958	GT335004	M10 X 1,5	100	15	39	10,0	3	DIN 371	6HX
4153961	GT335007	M12 X 1,5	100	15	39	9,0	4	DIN 374	6HX
4153959	GT335005	M12 X 1,75	110	18	44	9,0	4	DIN 376	6HX
4153962	GT335008	M14 X 1,5	100	15	47	11,0	4	DIN 374	6HX
4153960	GT335006	M14 X 2	110	20	52	11,0	4	DIN 376	6HX
4153963	GT335009	M16 X 1,5	100	15	46	12,0	4	DIN 374	6HX