


High-Performance Taps

Victory™ Spiral-Flute HSS-E-PM Taps • Blind Holes

WIDIA
GTD™

- WS32MG TiCN for nickel and nickel alloys.

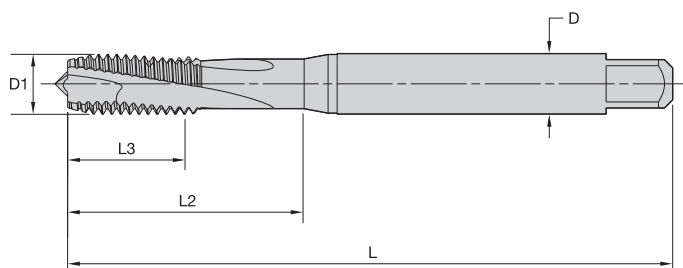


Shank Tolerance

D mm	tolerance h9
1-3	+0, -0,025
>3-6	+0, -0,030
>6-10	+0, -0,036
>10-18	+0, -0,043
>18-30	+0, -0,052

WIDIA
VICTORY

■ GT12 • Form C Semi-Bottoming Chamfer • Metric DIN 371 and 376 • For Nickel and Nickel Alloys



- first choice
- alternate choice

grade WS32MG TiCN		metric dimensions					number of flutes	dimension standard	class of fit
order #	catalogue #	D1 size	L	L3	L2	D			
4159636	GT125001	M3 X 0,5	56	11	18	3,5	2	DIN 371	6HX
4159637	GT125002	M4 X 0,7	63	13	21	4,5	3	DIN 371	6HX
4159638	GT125003	M5 X 0,8	70	15	25	6,0	3	DIN 371	6HX
4159639	GT125004	M6 X 1	80	17	30	6,0	3	DIN 371	6HX
4159640	GT125005	M8 X 1,25	90	20	35	8,0	3	DIN 371	6HX
4159641	GT125006	M10 X 1,5	100	22	39	10,0	3	DIN 371	6HX
4159642	GT125007	M12 X 1,75	110	24	—	9,0	3	DIN 376	6HX
4159663	GT125008	M14 X 2	110	26	—	11,0	3	DIN 376	6HX
4159664	GT125009	M16 X 2	110	27	—	12,0	3	DIN 376	6HX
4159665	GT125010	M20 X 2,5	140	32	—	16,0	3	DIN 376	6HX