


- GP6520 TiCN for cast iron and cast aluminium.




Shank Tolerance

D mm	tolerance h6
>3-6	+0, -0,008
>6-10	+0, -0,009
>10-18	+0, -0,011
>18-30	+0, -0,013
>30-50	+0, -0,016

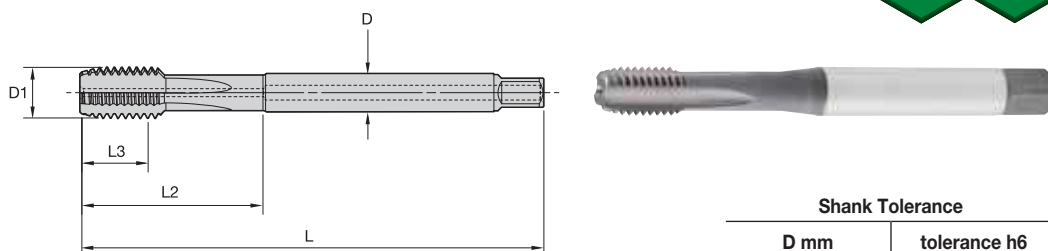

- GT41 • Form C Semi-Bottoming Chamfer • Through Coolant • Metric DIN 371, 374, and 376 • For Cast Iron and Cast Aluminium



● first choice

○ alternate choice

grade GP6520 TiCN		metric dimensions					number of flutes	dimension standard	class of fit
order #	catalogue #	D1 size	L	L3	L2	D			
4033659	GT415001	M4 X 0,7	63	10	21	4,5	3	DIN 371	6HX
4033660	GT415002	M5 X 0,8	70	10	25	6,0	3	DIN 371	6HX
4033661	GT415003	M6 X 1	80	10	30	6,0	4	DIN 371	6HX
4033662	GT415004	M8 X 1,25	90	13	35	8,0	4	DIN 371	6HX
4033813	GT415005	M10 X 1,5	100	15	39	10,0	4	DIN 371	6HX
5408069	GT415021	M12 X 1,5	100	15	39	9,0	4	DIN 374	6HX
4033814	GT415006	M12 X 1,75	110	18	44	9,0	4	DIN 376	6HX
5408400	GT415022	M14 X 1,5	100	15	47	11,0	4	DIN 374	6HX
4033815	GT415007	M14 X 2	110	20	52	11,0	4	DIN 376	6HX
5408401	GT415023	M16 X 1,5	100	15	46	12,0	4	DIN 374	6HX
4033816	GT415008	M16 X 2	110	20	51	12,0	4	DIN 376	6HX
4033817	GT415009	M18 X 2,5	125	25	58	14,0	4	DIN 376	6HX
4033818	GT415010	M20 X 2,5	140	25	64	16,0	4	DIN 376	6HX