


High-Performance Taps

Victory™ Straight-Flute HSS-E-PM Taps • Blind and Through Holes

WIDIA
GTD™

- WS32MG TiCN for steel 44–55 HRC.

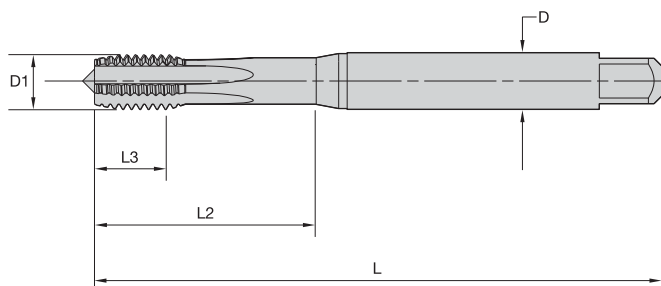


Shank Tolerance

D mm	tolerance h9
1–3	+0, -0,025
>3–6	+0, -0,030
>6–10	+0, -0,036
>10–18	+0, -0,043
>18–30	+0, -0,052

WIDIA
VICTORY

■ GT06 • Form C Semi-Bottoming Chamfer • Metric DIN 371, 374, and 376 • For Hard Steel



- first choice
- alternate choice

grade WS32MG TiCN		metric dimensions					number of flutes	dimension standard	class of fit
order #	catalogue #	D1 size	L	L3	L2	D			
4159915	GT065003	M6 X 1	80	10	30	6,0	4	DIN 371	6HX
4159918	GT065006	M8 X 1	90	10	35	8,0	5	DIN 374	6HX
4159913	GT065001	M8 X 1,25	90	14	35	8,0	5	DIN 371	6HX
4159919	GT065007	M10 X 1	90	10	35	10,0	5	DIN 374	6HX
4159914	GT065002	M10 X 1,5	100	16	39	10,0	5	DIN 371	6HX
4159920	GT065008	M12 X 1,5	100	15	—	9,0	5	DIN 374	6HX
4159916	GT065004	M12 X 1,75	110	18	—	9,0	5	DIN 376	6HX
4159921	GT065009	M14 X 1,5	100	15	—	11,0	6	DIN 374	6HX
4159922	GT065010	M16 X 1,5	100	15	—	12,0	6	DIN 374	6HX
4159917	GT065005	M16 X 2	110	22	—	12,0	6	DIN 376	6HX