


- WN14PG TiN + CrC/C for aluminium.




Shank Tolerance

D	tolerance h6
6	+0, -0,008
8-10	+0, -0,009
12-16	+0, -0,011

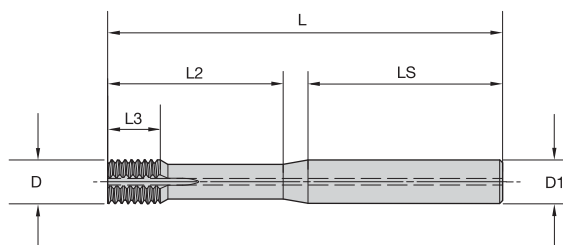

■ GX49 • Form E Bottoming Entry Taper • Through Coolant • Metric • For Aluminium



grade WN14PG
TiN+CrC/C

- first choice
- alternate choice

order #	catalogue #	D1 size	metric dimensions					number of lube grooves	class of fit
			L	L3	L2	LS	D		
5551169	GX492908	M6 X 1	70	8	24	42	6,0	2	6HX
5551170	GX492909	M8 X 1,25	80	10	32	43	8,0	2	6HX
5551171	GX492911	M10 X 1,5	90	12	40	44	10,0	3	6HX
5551173	GX492915	M12 X 1,5	100	14	48	46	12,0	3	6HX
5551172	GX492914	M12 X 1,75	100	14	48	46	12,0	3	6HX