


High-Performance Taps

Victory™ Forming Taps HSS-E-PM • Blind and Through Holes

WIDIA
GTD™

- WP31MG TiN for steel.
- WN38MG DLC for aluminium.

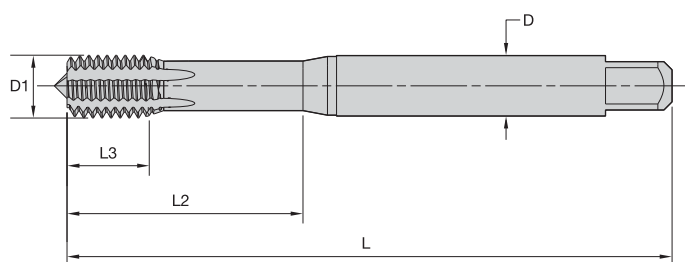


Shank Tolerance


D mm	tolerance h9
1-3	+0, -0,025
>3-6	+0, -0,030
>6-10	+0, -0,036
>10-18	+0, -0,043
>18-30	+0, -0,052

WIDIA
VICTORY

■ GT22 • Form C Semi-Bottoming Entry Taper • Metric DIN 2174 • For Steel and Aluminium



grade WP31MG
TiN



grade WN38MG
DLC

- first choice
- alternate choice

				metric dimensions					dimension standard	class of fit
order #	catalogue #	order #	catalogue #	D1 size	L	L3	L2	D		
4158495	GT225016	4154671	GT225001	M3 X 0,5	56	6	18	3,5	DIN 2174	6HX
4158496	GT225017	4154672	GT225002	M4 X 0,7	63	7	21	4,5	DIN 2174	6HX
4158497	GT225018	4154673	GT225003	M5 X 0,8	70	8	25	6,0	DIN 2174	6HX
4158498	GT225019	4154674	GT225004	M6 X 1	80	10	30	6,0	DIN 2174	6HX
4158513	GT225024	4154679	GT225009	M8 X 1	90	10	35	8,0	DIN 2174	6HX
4158499	GT225020	4154675	GT225005	M8 X 1,25	90	14	35	8,0	DIN 2174	6HX
4158514	GT225025	4154680	GT225010	M10 X 1	90	10	35	10,0	DIN 2174	6HX
4158515	GT225026	4154681	GT225011	M10 X 1,25	100	16	39	10,0	DIN 2174	6HX
4158500	GT225021	4154676	GT225006	M10 X 1,5	100	16	39	10,0	DIN 2174	6HX
4158516	GT225027	4154682	GT225012	M12 X 1,25	100	15	—	9,0	DIN 2174	6HX
4158517	GT225028	4154683	GT225013	M12 X 1,5	100	15	—	9,0	DIN 2174	6HX
4158501	GT225022	4154677	GT225007	M12 X 1,75	110	18	—	9,0	DIN 2174	6HX
4158518	GT225029	4154684	GT225014	M14 X 1,5	100	15	—	11,0	DIN 2174	6HX
4158519	GT225030	4154685	GT225015	M16 X 1,5	100	15	—	12,0	DIN 2174	6HX
4158502	GT225023	4154678	GT225008	M16 X 2	110	22	—	12,0	DIN 2174	6HX