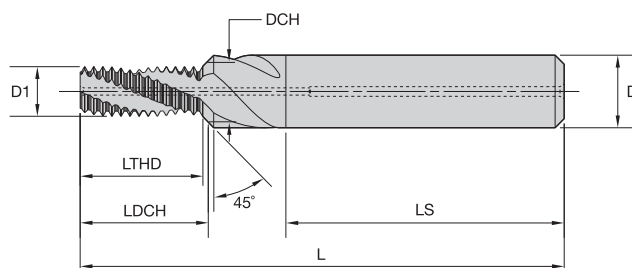


High-Performance Thread Mills

Victory™ Solid Carbide Thread Mills • Blind and Through Holes


WIDIA
GTD™

Shank Tolerance

D mm	tolerance h6
6	+0, -0,008
8-10	+0, -0,009
12-18	+0, -0,011
20-30	+0, -0,013

WIDIA
VICTORY

■ GTM21 • Through Coolant • Inch UNC and UNF

grade WU12PV
TiCN

- first choice
○ alternate choice

		metric dimensions								cutting edges
order #	catalogue #	D1 TPI	D1	DCH	LTHD	LDCH	L	LS	D	
4138537	GTM215024	#10-32	3,8	5,13	9,95	10,53	55	36	6,0	3
4138530	GTM215017	1/4-20	4,7	6,65	13,36	14,23	62	36	8,0	3
4138538	GTM215025	1/4-28	5,2	6,65	13,19	13,84	62	36	8,0	3
4138531	GTM215018	5/16-18	6,2	8,25	16,26	17,19	74	40	10,0	3
4138539	GTM215026	5/16-24	6,6	8,25	16,44	17,15	74	40	10,0	3
4138532	GTM215019	3/8-16	7,7	9,83	19,89	20,85	80	45	12,0	3
4138540	GTM215027	3/8-24	8,2	9,83	19,62	20,31	80	45	12,0	3
4138533	GTM215020	7/16-14	9,0	11,43	22,72	23,79	80	45	12,0	3
4138541	GTM215028	7/16-20	9,6	11,43	22,28	23,08	80	45	12,0	3
4138534	GTM215021	1/2-13	10,4	13,00	26,43	27,60	90	45	14,0	4
4138542	GTM215029	1/2-20	11,1	13,00	26,10	26,89	90	45	14,0	4
4138535	GTM215022	9/16-12	11,8	14,61	30,75	31,99	100	48	16,0	4
4138543	GTM215030	9/16-18	12,5	14,61	28,99	29,88	100	48	16,0	4
4138536	GTM215023	5/8-11	13,1	16,18	33,54	34,89	102	48	18,0	4
4138544	GTM215031	5/8-18	14,1	16,18	33,24	34,09	102	48	18,0	4