


Selecting the Correct Cutting Values

1. fz depends on the Ap1 and ae values


With round inserts, two factors can affect the hm: Ap1 and ae. fz has to be adjusted accordingly.



Recommended Starting Feed Rate Values (fz) Related to the Ap1 and ae Values:

ae engagement	10%	20%	30%	40%	50%	100%
Ap1 = 0,5mm	1,18mm	0,70mm	0,63mm	0,56mm	0,50mm	0,35mm
Ap1 = 0,75mm	0,95mm	0,62mm	0,56mm	0,50mm	0,45mm	0,30mm
Ap1 = 1mm	0,80mm	0,57mm	0,46mm	0,40mm	0,36mm	0,25mm
Ap1 = 2mm	0,57mm	0,40mm	0,33mm	0,28mm	0,25mm	0,18mm
Ap1 = 3mm	0,46mm	0,33mm	0,27mm	0,23mm	0,21mm	0,15mm
Ap1 = 5mm	0,36mm	0,25mm	0,21mm	0,18mm	0,16mm	0,11mm

Example application highlighted.




Example Cutting Conditions for RD..10... Insert in Pocketing, L/D ratio = 2 x D:

insert = RDPX1003M0SN			TN2505			TN6525			TN6540		
			feed per tooth fz (mm)/ae>50%								
			min	med	max	min	med	max	min	med	max
Edge Geometry MM	ae>50%	Recommended starting Ap1 = 1mm	-	-	-	0,25mm	0,30mm	0,40mm	0,25mm	0,32mm	0,45mm
Edge Geometry MH	ae>50%	Recommended starting Ap1 = 1mm	0,25mm	0,32mm	0,40mm	0,25mm	0,35mm	0,55mm	0,25mm	0,45mm	0,65mm

2. Ap1 and vc corrections depend on L/D ratio

With increasing L/D ratios, or overhang, vibrations can occur due to reduced rigidity. To ensure successful application, it is recommended to adjust Ap1 and vc values according to the following table:

L/D ratio	% of Ap1 max to reduce	% of vc to reduce
<2	0%	0%
2<L/D<4	65-75%	10-15%
>4	80-95%	20-40%

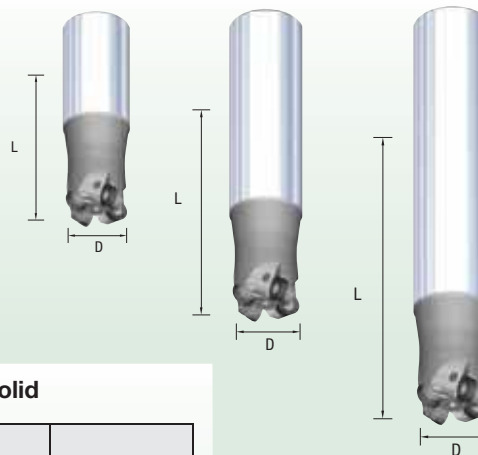

Recommended Cutting Conditions • Helical Interpolation from Solid

cutter diameter	min hole diameter	max hole diameter (flat bottom)	Ap1 max per revolution	max ramp angle	Ap1 max when plunging
20	22mm	30mm	2,1mm	20°	4mm
22	24mm	34mm	2,1mm	20°	2,4mm
25	33mm	40mm	3,2mm	8°	1,7mm
28	36mm	46mm	5mm	15°	3,8mm
30	40,6mm	50mm	5mm	10°	3,4mm
35	50,7mm	60mm	5mm	8,5°	3,4mm
40	60,5mm	70mm	5mm	7,2°	3,6mm
42	64,5mm	74mm	5mm	5,8°	3,6mm
50	80,3mm	90mm	5mm	5,2°	4mm
52	85,8mm	94mm	5mm	3°	2,2mm

