


Selecting the Correct Cutting Values

1. fz depends on the Ap1 and ae values


With round inserts, two factors can affect the hm: Ap1 and ae. fz has to be adjusted accordingly.

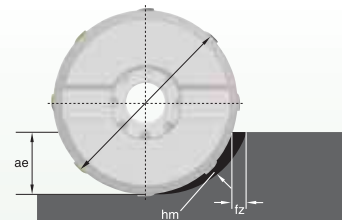

Recommended Starting Feed Rate Values (fz) Related to the Ap1 and ae Values:

ae engagement	10%	20%	30%	40%	50%	100%
Ap1 = 1mm	1,52mm	1,07mm	0,88mm	0,76mm	0,68mm	0,48mm
Ap1 = 2mm	1,07mm	0,76mm	0,62mm	0,54mm	0,48mm	0,34mm
Ap1 = 3mm	0,88mm	0,62mm	0,51mm	0,44mm	0,39mm	0,28mm
Ap1 = 4mm	0,76mm	0,54mm	0,44mm	0,38mm	0,34mm	0,24mm
Ap1 = 5mm	0,62mm	0,44mm	0,36mm	0,31mm	0,26mm	0,20mm
Ap1 = 6mm	0,54mm	0,38mm	0,31mm	0,27mm	0,24mm	0,17mm

Example application highlighted.

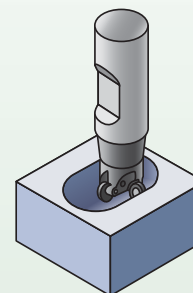


Example Cutting Conditions for iC16mm... Insert in Pocketing, up to 3 L/D approximately:

insert = RDPX1604M0SN			TN2505			TN6525			TN6540		
			feed per tooth fz (mm)/ae>50%								
			min	med	max	min	med	max	min	med	max
Edge Geometry MM	ae>50%	Recommended starting Ap1 = 3mm	-	-	-	0,28mm	0,45mm	0,65mm	0,28mm	0,50mm	0,70mm
Edge Geometry MH	ae>50%	Recommended starting Ap1 = 3mm	0,28mm	0,35mm	0,50mm	0,28mm	0,50mm	0,75mm	0,28mm	0,60mm	0,80mm

2. Ap1 and vc corrections depend on L/D ratio

With increasing L/D ratios, or overhang, vibrations can occur due to reduced rigidity. To ensure successful application, it is recommended to adjust Ap1 and vc values according to the following table:

L/D ratio	% of Ap1 max to reduce	% of vc to reduce
<2	0%	0%
2<L/D<4	65-75%	10-15%
>4	80-95%	20-40%

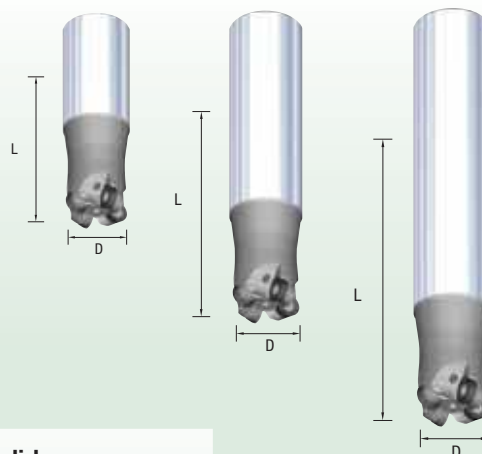

Recommended Cutting Conditions • Helical Interpolation from Solid

cutter diameter	min hole diameter	max hole diameter (flat bottom)	Ap1 max per revolution	max ramp angle	Ap1 max when plunging
32	36mm	48mm	3mm	20°	3mm
50	69mm	84mm	8mm	9,5°	4,8mm
52	73mm	88mm	8mm	8,2°	5mm
63	95mm	110mm	8mm	5,5°	4,7mm
66	101mm	120mm	8mm	4°	4,2mm
80	129mm	144mm	8mm	3°	4,1mm
100	169mm	184mm	8mm	2,4°	4,6mm
125	219mm	234mm	8mm	2,2°	4,4mm

