



- Centre cutting.
- Chamfered pitch.
- Standard items listed. Additional styles and coatings made-to-order.

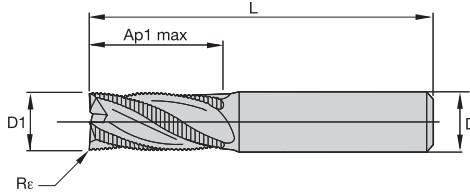


End Mill Tolerances

D1	tolerance d11	D	tolerance h6 + / -
≤ 3	-0,020/-0,080	≤ 3	0/0,006
> 3-6	-0,030/-0,105	> 3-6	0/0,008
> 6-10	-0,040/-0,130	> 6-10	0/0,009
> 10-18	-0,050/-0,160	> 10-18	0/0,011
> 18-30	-0,065/-0,195	> 18-30	0/0,013

■ Series 4979



grade UNCOATED



grade TiCN-CT
TiCN

- first choice
- alternate choice

order #	catalogue #	order #	catalogue #	D1	D	length of cut Ap1 max	length L	Re
1858322	497906002..	1858423	497906002CT	6,0	6	13,00	57	0,25
1858424	497908003..	1858425	497908003CT	8,0	8	16,00	63	0,25
1858426	497910004..	1858427	497910004CT	10,0	10	22,00	72	0,50
1858428	497912005..	1858430	497912005CT	12,0	12	26,00	83	0,50
1858434	497916006..	1858437	497916006CT	16,0	16	32,00	92	1,00
1858441	497920007..	1858463	497920007CT	20,0	20	38,00	104	1,00
1858465	497925008..	1858466	497925008CT	25,0	25	45,00	121	1,50

High-Performance Solid Carbide End Mills