



- Centre cutting.
- Standard items listed. Additional styles and coatings made-to-order.

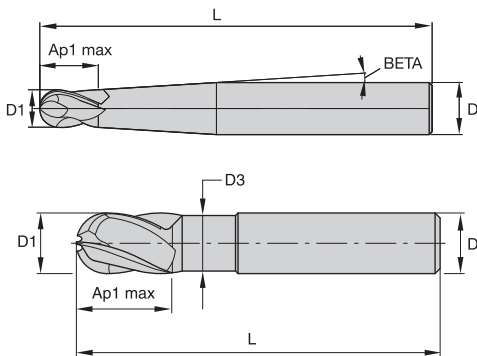

End Mill Tolerances

D1	tolerance e8	D	tolerance h6 + / -
≤ 3	-0,014/-0,028	≤ 3	0/0,006
> 3-6	-0,020/-0,038	> 3-6	0/0,008
> 6-10	-0,025/-0,047	> 6-10	0/0,009
> 10-18	-0,032/-0,059	> 10-18	0/0,011
> 18-30	-0,040/-0,073	> 18-30	0/0,013

■ Series 7050 7060 • Vision Plus



grade TiAlN-RT1  
TiAlN

- first choice
- alternate choice

order #	catalogue #	D1	D	D3	length of cut Ap1 max	L3	length L	BETA
1724321	705002001RT	2,0	4	—	2,00	2,00	63	2.5
2495913	706002001RT	2,0	4	—	2,00	2,00	63	3.5
1724322	705002501RT	2,5	4	—	2,50	2,50	63	2.5
2495914	706002501RT	2,5	4	—	2,50	2,50	63	3.0
1724323	705003002RT	3,0	6	—	3,00	3,00	75	2.5
2495915	706003002RT	3,0	6	—	3,00	3,00	75	1.5
1724324	705004002RT	4,0	6	—	4,00	4,00	75	2.5
2495916	706004002RT	4,0	6	—	4,00	4,00	75	1.5
1724325	705005002RT	5,0	6	—	5,00	5,00	75	2.5
2495917	706005002RT	5,0	6	—	5,00	5,00	75	1.5
1724326	705006004RT	6,0	10	—	6,00	6,00	100	2.5
2495918	706006004RT	6,0	10	—	6,00	6,00	100	1.5
1724327	705008004RT	8,0	10	—	8,00	8,00	100	2.5
2495919	706008004RT	8,0	10	—	8,00	8,00	100	1.5
1724328	705010005RT	10,0	12	—	10,00	10,00	125	2.5
2495920	706010005RT	10,0	12	—	10,00	10,00	125	1.5
1724329	705012006RT	12,0	16	—	12,00	12,00	125	2.5
2495921	706012006RT	12,0	16	—	12,00	12,00	125	1.5
1724330	705016006RT	16,0	16	15,00	16,00	48,00	125	—
1724361	705020007RT	20,0	20	19,00	20,00	60,00	150	—