


High-Performance Taps

Victory™ Spiral-Point Plug HSS-E-PM Taps • Through Holes

WIDIA
 GTD™

- WP31MG TiN for steel
32–44 HRC.

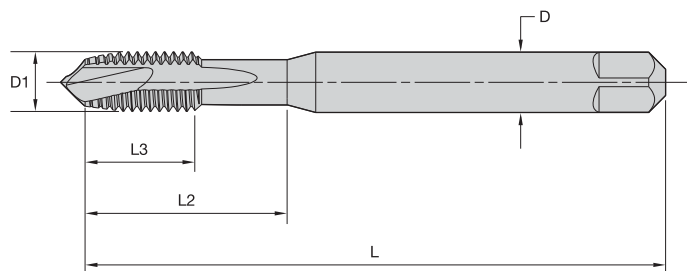


Shank Tolerance

D mm	tolerance h9
1–3	+0, -0,025
>3–6	+0, -0,030
>6–10	+0, -0,036
>10–18	+0, -0,043
>18–30	+0, -0,052

WIDIA
VICTORY

■ GT00 • Form B Plug Chamfer • Metric DIN 371, 374, and 376 • For Hard Steel



- first choice
- alternate choice

grade WP31MG TiN		metric dimensions					number of flutes	dimension standard	class of fit
order #	catalogue #	D1 size	L	L3	L2	D			
4153679	GT005001	M3 X 0,5	56	11	18	3,5	2	DIN 371	6HX
4153680	GT005002	M4 X 0,7	63	13	21	4,5	2	DIN 371	6HX
4153681	GT005003	M5 X 0,8	70	15	25	6,0	2	DIN 371	6HX
4153682	GT005004	M6 X 1	80	17	30	6,0	3	DIN 371	6HX
4153760	GT005012	M8 X 1	90	17	—	6,0	3	DIN 374	6HX
4153753	GT005005	M8 X 1,25	90	20	35	8,0	3	DIN 371	6HX
4153761	GT005013	M10 X 1	90	18	—	7,0	3	DIN 374	6HX
4153762	GT005014	M10 X 1,25	100	22	—	7,0	3	DIN 374	6HX
4153754	GT005006	M10 X 1,5	100	22	39	10,0	3	DIN 371	6HX
4153763	GT005015	M12 X 1,25	100	22	—	9,0	3	DIN 374	6HX
4153764	GT005016	M12 X 1,5	100	22	—	9,0	3	DIN 374	6HX
4153755	GT005007	M12 X 1,75	110	24	—	9,0	3	DIN 376	6HX
4153765	GT005017	M14 X 1,5	100	22	—	11,0	3	DIN 374	6HX
4153756	GT005008	M14 X 2	110	26	—	11,0	3	DIN 376	6HX
4153766	GT005018	M16 X 1,5	100	22	—	12,0	4	DIN 374	6HX
4153757	GT005009	M16 X 2	110	27	—	12,0	4	DIN 376	6HX
4153758	GT005010	M18 X 2	125	30	—	14,0	4	DIN 376	6HX
4153759	GT005011	M20 X 2,5	140	32	—	16,0	4	DIN 376	6HX