


High-Performance Taps

Victory™ Straight-Flute HSS-E-PM Taps • Through and Blind Holes

WIDIA
GTD™

- GP6520 TiCN for cast iron and cast aluminium.

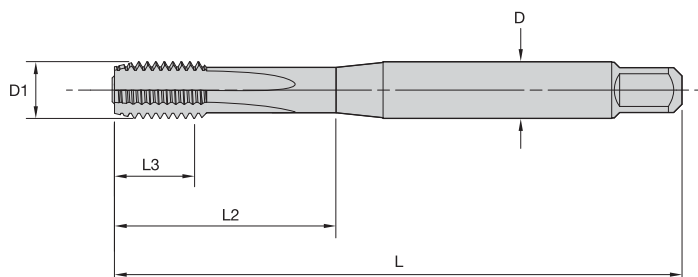


Shank Tolerance

D mm	tolerance h6
>3-6	+0, -0,008
>6-10	+0, -0,009
>10-18	+0, -0,011
>18-30	+0, -0,013
>30-50	+0, -0,016

WIDIA
VICTORY

- GT40 • Form C Semi-Bottoming Chamfer • Metric DIN 371, 374, and 376 • For Cast Iron and Cast Aluminium



- first choice
- alternate choice

grade GP6520 TiCN		metric dimensions					number of flutes	dimension standard	class of fit
order #	catalogue #	D1 size	L	L3	L2	D			
4033699	GT405001	M4 X 0,7	63	10	21	4,5	3	DIN 371	6HX
4033700	GT405002	M5 X 0,8	70	10	25	6,0	3	DIN 371	6HX
4033701	GT405003	M6 X 1	80	10	30	6,0	4	DIN 371	6HX
4033702	GT405004	M8 X 1,25	90	13	35	8,0	4	DIN 371	6HX
4033753	GT405005	M10 X 1,5	100	15	39	10,0	4	DIN 371	6HX
5408066	GT405057	M12 X 1,5	100	15	39	9,0	4	DIN 374	6HX
4033754	GT405006	M12 X 1,75	110	18	44	9,0	4	DIN 376	6HX
5408067	GT405058	M14 X 1,5	100	15	47	11,0	4	DIN 374	6HX
4033755	GT405007	M14 X 2	110	20	52	11,0	4	DIN 376	6HX
5408068	GT405059	M16 X 1,5	100	15	46	12,0	4	DIN 374	6HX
4033756	GT405008	M16 X 2	110	20	51	12,0	4	DIN 376	6HX
4033757	GT405009	M18 X 2,5	125	25	58	14,0	4	DIN 376	6HX
4033758	GT405010	M20 X 2,5	140	25	64	16,0	4	DIN 376	6HX
4033759	GT405011	M22 X 2,5	140	25	70	18,0	4	DIN 376	6HX