


High-Performance Taps

Victory™ Straight-Flute HSS-E-PM Taps • Threading Close to the Bottom in Blind Holes

WIDIA
GTD™

- GP6520 TiCN for cast iron and cast aluminium.

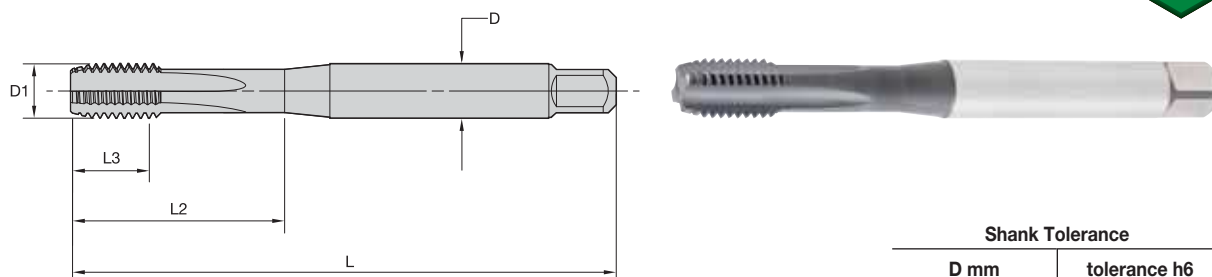


Shank Tolerance

D mm	tolerance h6
>3-6	+0, -0,008
>6-10	+0, -0,009
>10-18	+0, -0,011
>18-30	+0, -0,013
>30-50	+0, -0,016

WIDIA
VICTORY

■ GT42 • Form E Bottoming Chamfer • Metric DIN 371, 374, and 376 • For Cast Iron and Cast Aluminium



- first choice
- alternate choice

grade GP6520 TiCN		metric dimensions					number of flutes	dimension standard	class of fit
order #	catalogue #	D1 size	L	L3	L2	D			
4154274	GT425001	M5 X 0,8	70	10	25	6,0	3	DIN 371	6HX
4154275	GT425002	M6 X 1	80	10	30	6,0	4	DIN 371	6HX
4154276	GT425003	M8 X 1,25	90	13	35	8,0	4	DIN 371	6HX
4154277	GT425004	M10 X 1,5	100	15	39	10,0	4	DIN 371	6HX
4154280	GT425007	M12 X 1,5	100	15	39	9,0	4	DIN 374	6HX
4154278	GT425005	M12 X 1,75	110	18	44	9,0	4	DIN 376	6HX
4154281	GT425008	M14 X 1,5	100	15	47	11,0	4	DIN 374	6HX
4154279	GT425006	M14 X 2	110	20	52	11,0	4	DIN 376	6HX
4154282	GT425009	M16 X 1,5	100	15	46	12,0	4	DIN 374	6HX
5408402	GT425010	M16 X 2	110	20	51	12,0	4	DIN 376	6HX
5408403	GT425011	M18 X 2,5	125	25	58	14,0	4	DIN 376	6HX
5408404	GT425012	M20 X 2,5	140	25	64	16,0	4	DIN 376	6HX