
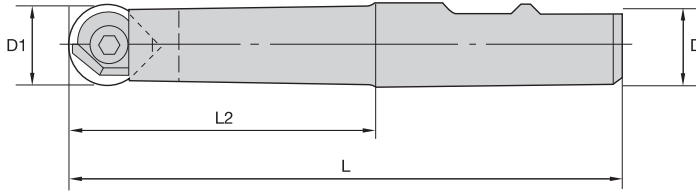


- Rough, semi-finishing, and finishing with one system.
- Secure and rigid insert clamping.



■ **Ball Nose • Weldon® Shanks**

order number	catalogue number	D1	D	L	L2	Z	Z U	inserts	max RPM	coolant supply	kg
2243618	M270BD010B12L90	10	12	90	45	1	2	M270B.10	57000	No	0,10
2243619	M270BD012B12L95	12	12	95	50	1	2	M270B.12	55000	No	0,10
2243620	M270BD016B16L105	16	16	105	57	1	2	M270B.16	53000	No	0,10
2243621	M270BD020B20L120	20	20	120	70	1	2	M270B.20	52000	No	0,20
2243622	M270BD025B25L145	25	25	145	89	1	2	M270B.25	50000	No	0,40
2243623	M270BD032B32L155	32	32	155	95	1	2	M270B.32	46000	No	0,80

NOTE: ZU = Effective teeth.
Z = number of pocket seats.

■ **Spare Parts**



D1	insert screw	Nm	Torx driver
10	12748610500	2,0	12148788900
12	12748610600	2,0	12148788900
16	12748610700	5,0	12148099300
20	12748610800	5,0	12148099300
25	12748610900	7,0	12148086800
32	12748611000	7,0	12146006300

NOTE: All spare parts except the insert screws must be ordered separately.

Copy Mills